

Ventilation engineering

**85%** Up to**heat
recovery**

Fresh Air Heat Recovery Unit

The ideal complement to help you save energy around the house

Airing regularly protects your health and the substance of your building. It is particularly important that you consider this aspect in heat-insulated houses with well-sealed windows and doors. However: heat and expensive thermal energy are lost when the windows are open. The solution: the Marley fresh air heat recovery unit for innovative ventilation. In this system, the waste air from the room warms the incoming fresh air as it flows out.

Keeps heat in the house – the Marley Fresh Air Heat Recovery Unit

- **Continuous basic ventilation:**
in the living room, bedroom and bathroom, etc.
- **Keeps you and your building healthy:**
no damp, no mould

**Do it with Marley.**

The Marley Fresh Air Heat Recovery Unit keeps heat in the house

Stand Alone Operation

Warm, stale air is transported from the room to the outside for 70 seconds, heating the ceramic element in the process. Then the unit changes the direction of flow: now, fresh air from outside flows into the room, heated in the process by the warmth stored in the ceramic element.

Dialogue Operation

While one unit provides fresh air, at the same time the second unit transports warm, stale air to the outside. During this process, the heat energy contained in the waste air is stored in the ceramic element. After 70 seconds, the ventilators change their direction of flow. Both units communicate with each other via radio contact.



Stand Alone Operation



Dialogue Operation

Marley Benefits:

- Condensation is produced in the device during extraction of the waste air. Unlike in standard heat recovery units, it is not necessary to extract this condensation; instead, the moisture is absorbed by the incoming fresh air as it heats up after the system's flow direction has changed.
- This prevents excessive dryness of the interior atmosphere and guarantees a good room climate, especially in winter.

Technical data:

Ventilator with 3 performance levels:

Ⓛ 15 m³/h, Ⓜ 25 m³/h, Ⓢ 40 m³/h

Power input:

Ⓛ 3.5 Watt, Ⓜ 5 Watt, Ⓢ 8 Watt

Heat recovery rate:

max. 85 %, Ø 79.1 %

Sound pressure (3 m):

Ⓛ 22 dB (A), Ⓜ 29 dB (A), Ⓢ 35 dB (A)

Outer wall thicknesses:

280–500 mm

Size of cover:

240 x 240 mm

Diameter of drill hole:

180 mm

UV-resistant

Outer material


- Outside hood with protective guard in a modern, timeless design, UV-resistant, protects the house wall against unsightly water blemishes

In the wall

- Maintenance-free ventilator with 3 performance levels
- G3 filter
- Wall duct can be shortened
- Insulating pipe

Inside material

- Decorative front cover with filter
- Main switch
- Simple operation with remote control for one unit or unit pair

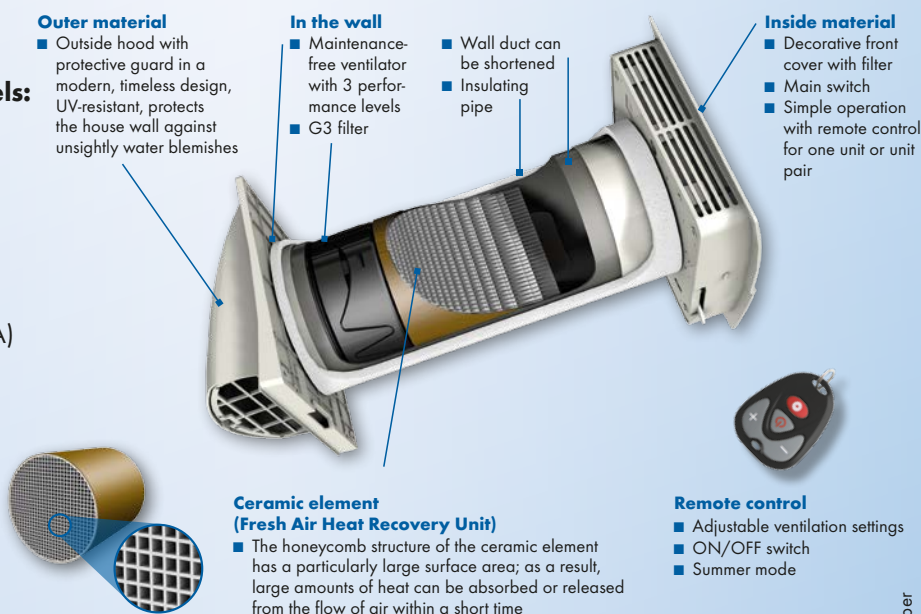

Ceramic element (Fresh Air Heat Recovery Unit)

- The honeycomb structure of the ceramic element has a particularly large surface area; as a result, large amounts of heat can be absorbed or released from the flow of air within a short time

Remote control

- Adjustable ventilation settings
- ON/OFF switch
- Summer mode

an *OAliaxis* company



Marley Deutschland GmbH
Adolf-Oesterheld-Str. 28
D-31515 Wunstorf
www.marley-germany.com

Phone +49.(0)5031.53-0
Fax +49.(0)5031.53-333

